
### **Seal Kit for Service Motor**

# If installed, remove and discard internal rubber bushing before installing cable and cable bushing. Cutting the bushing in the two locations shown will aid in installation.


Lit. No. 48939, Rev. 00 March 15, 2011

### **Seal Kit for Service Motor**

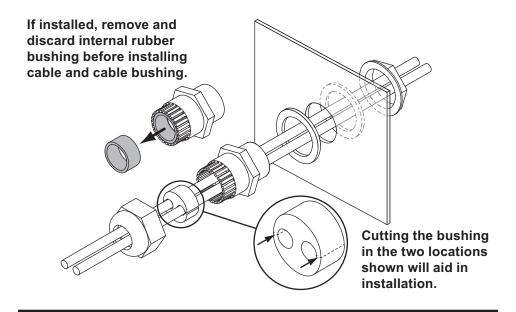


Lit. No. 48939, Rev. 00 March 15, 2011

## **Seal Kit for Service Motor**

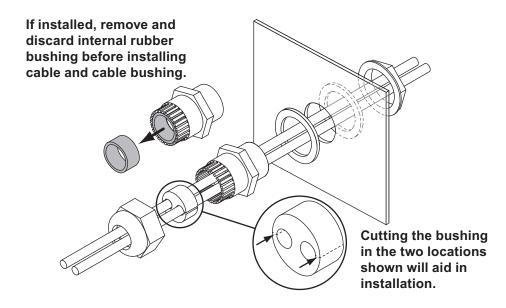

# **Seal Kit for Service Motor**

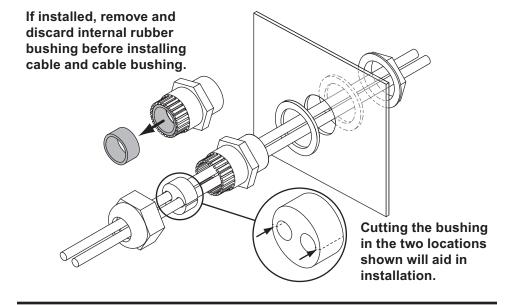

Lit. No. 48939, Rev. 00 March 15, 2011 Lit. No. 48939, Rev. 00 March 15, 2011

A DIVISION OR SUBSIDIARY OF DOUGLAS DYNAMICS, L.L.C.

A DIVISION OR SUBSIDIARY OF DOUGLAS DYNAMICS, L.L.C.

The company reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used.

Printed in U.S.A.

Lit. No. 48939, Rev. 00 March 15, 2011

The company reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used.

Printed in U.S.A.

Lit. No. 48939. Rev. 00 March 15. 2011

**A DIVISION OR SUBSIDIARY OF DOUGLAS DYNAMICS, L.L.C.** 

A DIVISION OR SUBSIDIARY OF DOUGLAS DYNAMICS, L.L.C.

The company reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used.

The company reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used.

Printed in U.S.A. Printed in U.S.A.

Lit. No. 48939, Rev. 00 March 15, 2011 Lit. No. 48939, Rev. 00 March 15, 2011