


Central Grease Point Kit

Poly & Stainless Steel Hopper Spreaders

PARTS LIST

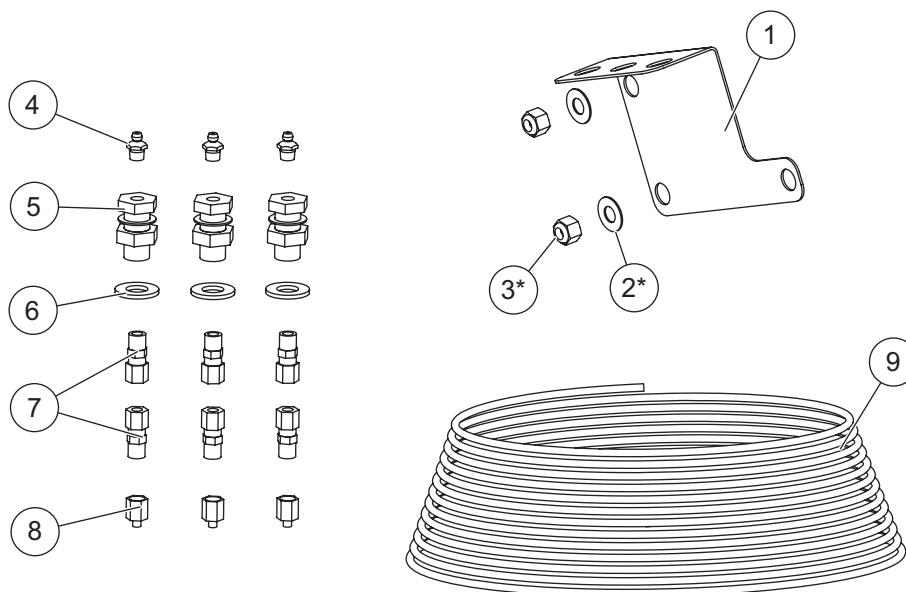

11763 Central Grease Point Kit							
Item	Part	Qty	Description	Item	Part	Qty	Description
1	11845	1	Bracket	6		3	1/2 Flat Washer SS
2*		2	3/8 Flat Washer Wide SS	7	D6984	6	1/4 Compression Fitting
3*		2	3/8-16 Hex Locknut GB	8	D6985	3	1/4-28 x 1/8 Female Adapter
4	B61400	3	1/8 NPT Straight Grease Zerk	9	D6987	1	1/4 Nylon Tubing – 300"
5	D6982	3	1/8 Bulkhead Coupling Brass				
G = Grade				SS = Stainless Steel			

* Used for poly hopper installations only.

⚠ WARNING

Do not exceed GVWR or GAWR ratings as found on the driver-side vehicle door cornerpost.

⚠ CAUTION

Use standard methods and practices when attaching spreader and installing accessories, including proper personal protective safety equipment.

⚠ CAUTION


Read this document before installing the Central Grease Point Kit.

INSTALLATION INSTRUCTIONS


The Central Grease Point Kit adds remote grease points for the sill bearings on stainless steel and poly hopper spreaders. This kit applies to the idler shaft and drive shaft bearings only. The spinner bearings are accessed by removing the chute cover.

1. Install the bracket.


Stainless Steel Hopper: Remove the existing 1/2" locknuts and washers from the two carriage bolts visible to the right of the drive shaft bearing. Install the bracket onto the exposed bolts as shown. Reinstall the washers and locknuts and tighten to 75 ft-lb.

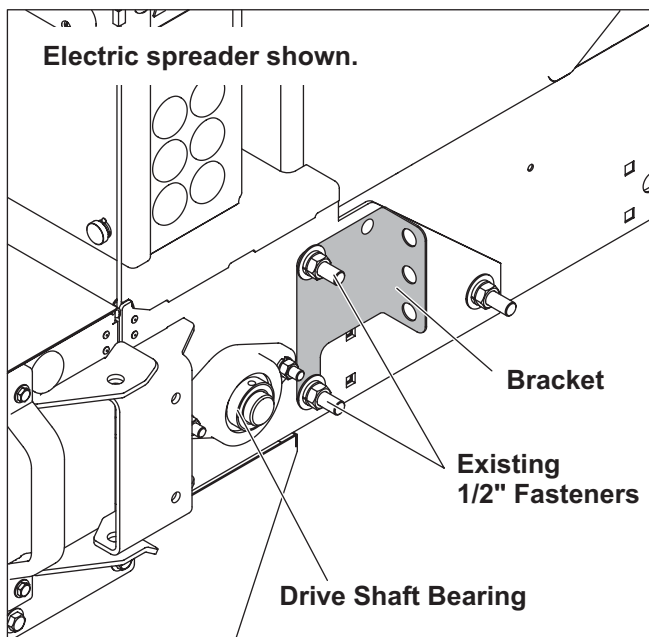

Poly Hopper: Remove the spinner chute cover. Remove the existing 3/8" nuts and lock washers from the two top fasteners on the gear box attachment plate. Install the bracket onto the exposed bolts as shown. Install the supplied 3/8" flat washers and locknuts in place of the original lock washers and nuts, and tighten to 30 ft-lb.

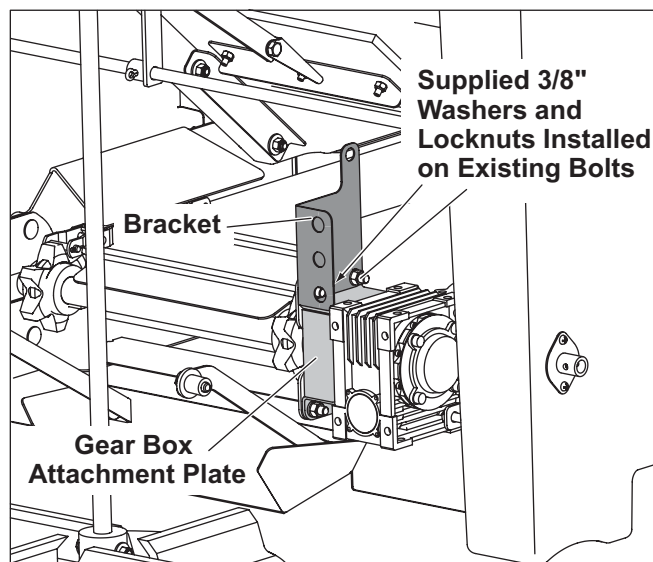


2. Install a supplied 1/8" brass bulkhead coupling to the bracket for each planned grease fitting extension. Remove the hex nut and lock washer and insert the coupling through the bracket with the head of the coupling facing toward the spreader chute. Install a supplied 1/2" flat washer, then reinstall the original lock washer and hex nut onto the coupling as shown. Use a pair of crescent wrenches to tighten.

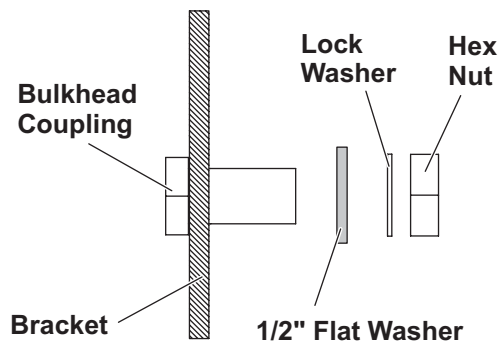


3. Install a supplied 1/8" straight grease zerk to the head of each bulkhead coupling. Use a pair of crescent wrenches to tighten.
4. Measure and cut a length of 1/4" nylon tubing to reach from the bracket to each bearing where an extended grease fittings is desired.
5. Install a 1/4" compression fitting on both ends of each length of tubing.
 - a. Separate the compression fitting components: body, nut, and ferrule.
 - b. Slide the nut onto one end of a length of tubing. Position the ferrule at the end of the hose, then slide the body onto the tubing and through the nut until it bottoms out. Make sure that the ferrule remains seated and squared to the tubing.
 - c. Using one wrench to hold the fitting body and another to turn the nut, tighten the nut 3/4 turn. *Do not overtighten* as this may damage the fitting or ferrule.
6. Route the prepared lengths of tubing between the bracket and the sill bearings. To reach the idler shaft bearings, run the tubing along the length of the hopper as shown below.

Stainless Steel Hopper: Route the tubing through the channels in the hopper legs.

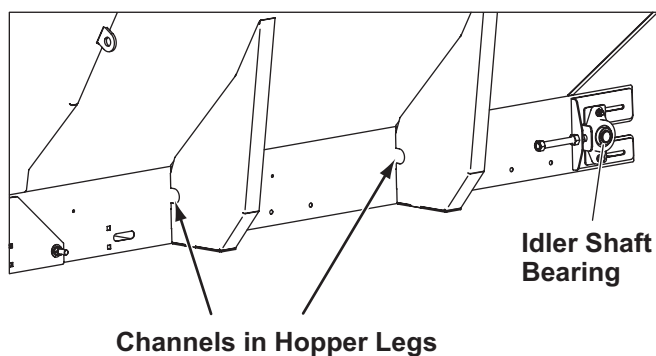

Poly Hopper: The tubing can be routed either between the hopper and the sill or through the channels in the hopper legs (if provided).

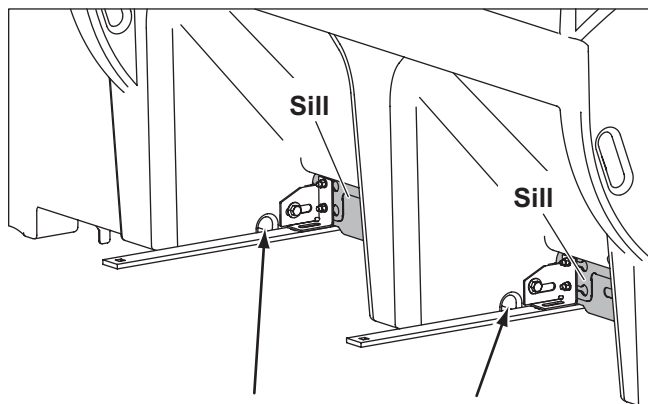

Channels in Hopper Legs

7. Using a 5/16" wrench, remove the existing grease zerks from the affected sill bearings. Install a supplied 1/4" x 1/8" female adapter in place of the original zerk.
8. Install one end of a prepared length of tubing to each of the female adapters installed in Step 7. Use a pair of crescent wrenches to tighten the compression fitting to the female adapter.
9. Install the free ends of the prepared tubing to the hopper body side of the bulkhead couplings. Use a pair of crescent wrenches to tighten the fittings.

Copyright © 2018 Douglas Dynamics, LLC. All rights reserved. This material may not be reproduced or copied, in whole or in part, in any printed, mechanical, electronic, film, or other distribution and storage media, without the written consent of the company. Authorization to photocopy items for internal or personal use by the company's outlets or spreader owner is granted.

The company reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used. This equipment manufacturer or the vehicle manufacturer may require or recommend optional equipment for spreaders. Do not exceed vehicle ratings with a spreader. The company offers a limited warranty for all spreaders and accessories. See separately printed page for this important information.

Printed in U.S.A.
